

B.SMART Piusi

LIQUIP VICTORIA
THE HOME OF Fuelcraft



B.SMART

The New Era of Fuel Management



Bluetooth controlled



Cloud Managed

Piusi's B.SMART is a unique, expandable Fuel Management System that is bluetooth controlled and cloud managed, providing real-time control and reporting and operators with trouble free access to pumping devices via a bluetooth controlled, smart device app.

- ▶ No software installation is required.
- ▶ No network cable is required for install.
- ▶ Monitor multiple dispensers across unlimited sites in a single portal, suitable for any size fleet or company.
- ▶ Transaction data is sent straight to the cloud to enable real time monitoring, once fuelling is complete
- ▶ Fleet manager can remotely access data and reports via the cloud-based web portal from all smart devices.
- ▶ Fleet manager can remotely enable/disable driver access to the pump to control who is able to dispense fuel, preventing unauthorised use
- ▶ There are no ongoing monthly or annual subscriptions/ hosting fees
- ▶ A registered key fob can be used as a back up to a pump if an operators mobile device cannot be used
- ▶ Flow rates up to 90 litres per minute.
- ▶ Power: AC or DC voltage




An intuitive and simple Fuel Management System - composed by hardware and software (APP for drivers and a web APP on Cloud for fleet managers) driven by Bluetooth technology - to easily monitor and manage any fleet; from the smallest to the biggest.

MCBOX

MC B.SMART control panel to be used with the existing equipment.

Main Features:

- ▶ It can control any pump, pulse meter and nozzle contact
- ▶ Ideal for existing plants
- ▶ Real time communication between dispenser and the PC

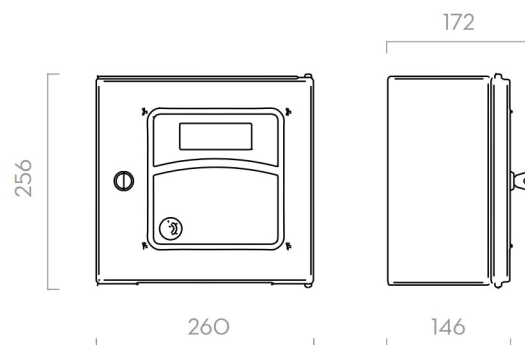


CUBE

Cube B.SMART is the upgraded version of the most famous PIUSI cube dispenser

Main Features:

- ▶ Free standing and table design
- ▶ Flow rate up to 90 l/min
- ▶ Accuracy: +/- 0.5%
- ▶ Noise level <75 dB

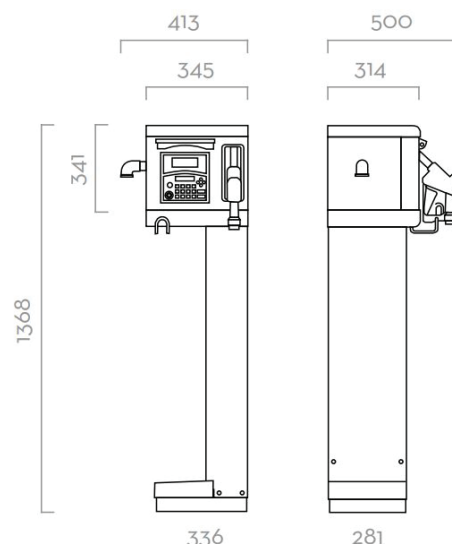


SELF SERVICE

A complete device suitable to fit all diesel dispensing needs.

Main Features:

- ▶ Flow rate up to 90 l/min
- ▶ Accuracy: +/- 0.5%
- ▶ Noise level <75 dB
- ▶ PIUSI water captor filter included
- ▶ Integrated nozzle contact

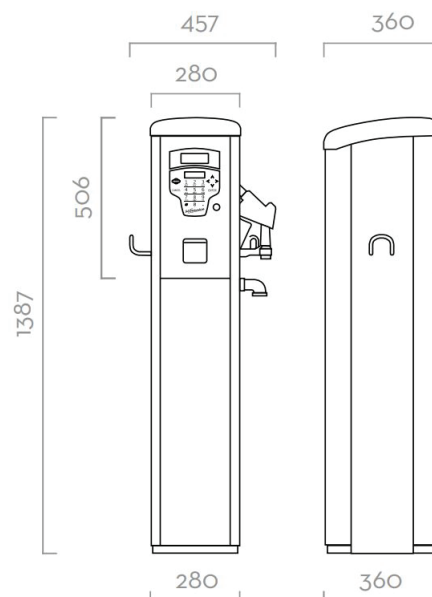

Measurements in millimeters