



A1 SERIES COMMERCIAL GRADE METERS

FLOMEC® A1 Series Meters are designed as self-contained, battery powered units. Select the A1 Series when you need an accurate, meter for petroleum products, water or non-aggressive chemical applications.

- Available in Aluminum or Nylon
- Aluminum model is available in three sizes
- Use the Aluminum model for petroleum products
- Nylon meter for use in water or non-aggressive chemical applications

FEATURES / BENEFITS

- Unique package combines Turbine and LCD into a self-contained, compact, economical meter
- Local Display Computer features: 2 Totals (Batch Total = Resettable, Total = Non-resettable) and Rate of Flow. Includes non-volatile totals.
- Output capabilities available to communicate with process control equipment
- Lightweight, compact design allows for easy installation
- AAA Alkaline battery life: 2 years
- Factory calibration in gallons or litres (can also be field calibrated to other fluids)

APPLICATIONS	
<ul style="list-style-type: none"> • Fuel Transfer • Plant Process Water (Nylon model) • Batching / Blending 	<ul style="list-style-type: none"> • Fuel Products (Aluminum model) • Water / Non-Aggressive Chemicals (Nylon model) • Ag Chemicals • Solvents / Glycol • Chemical Feed Lines



PRODUCT CONFIGURATION

- PRODUCT IDENTIFIER:**
A1 = Commercial Grade Electronic Digital Meter
- ELECTRONIC CHOICE:**
Computer Display, Meter Mounted
Q9 = Q9 2-Button Computer
Computer Display & Module, Meter Mounted*
P9 = Q9 2-Button Computer w/Pulse Out Module, includes External Power and 10 ft. of Cable
42 = Q9 2-Button Computer w/4-20mA Module and 10 ft. of Cable
Module, Meter Mounted (No Display)*
PO = Pulse Out (Unscaled) Conditioned Signal Module w/Cable
Retrofit Computer Kit (Display Only)
R9 = Q9 2-Button Computer Retrofit Kit (Replaces Q9 Display)
No Electronics - Turbine Only
XX = No Electronics - Turbine Only
**All Electronics Approvals Void*

- CALIBRATION:**
GM = GPM & L/min (Gallons Default)
LM = GPM & L/min (Litres Default)
XX = No Computer

- TURBINE SIZE:**
A025 = Aluminum - Low Flow
A100 = Aluminum - 1 inch
A200 = Aluminum - 2 inch
N025 = Nylon - Low Flow
N100 = Nylon - 1 inch
X### = No Turbine**
***When ordering Display Only, the ### should be the turbine size.*

- FITTING TYPE:**
N = NPT (Female)
I = ISO (Female) BSPT
B = BSPP Female - available on A025 and A100 turbines only
X = No Turbine

- PACKAGING:**
With FM, ATEX & IEC Approval for **HAZARDOUS AREA**
A1 = Standard or Low Flow, 1 inch (w/Q9 & R9 Electronics Choice)
A2 = Standard, 2 inch (w/Q9 & R9 Electronics Choice)
B1 = Standard or Low Flow, 1 inch Turbine Only
B2 = Standard, 2 inch Turbine Only
B3 = Display Only
Non-Approved Version - SAFE AREA ONLY
C2 = Low Flow through 2 inch Turbines (w/P9, 42, & PO Electronics Choice)

1 2 3 4 5 6
---->>>> A1 Q9 GM N100 N A1

APPROVALS[†]	CE	ATEX Ex	NEMA 4
FM APPROVED	FM APPROVED	IP65	IEC IECEx

[†]All A1 Series Q9 Displays have the CE, NEMA 4, and IP65 approval.

SPECIFICATIONS


Meter Sizes Available:	A025 (Low Flow), A100 (1 inch), A200 (2 inch), N025 (Low Flow), N100 (1 inch)		
Design Type:	A025	Paddlewheel	
	A100	Turbine	
	A200	Turbine	
	N025	Paddlewheel	
	N100	Turbine	
Fitting Size / Fitting Type:	A025	1 inch / NPT, ISO* or BSPP (Female)	
	A100	1 inch / NPT, ISO* or BSPP (Female)	
	A200	2 inch / NPT, ISO*	
	N025	1 inch / NPT, ISO* (Female)	
	N100	1 inch / NPT, ISO* (Female)	
Flow Range:	A025	0.3 - 3 GPM	1 - 11 L/min
	A100	3 - 50 GPM	11 - 190 L/min
	A200	30 - 300 GPM	114 - 1,135 L/min
	N025	0.3 - 3 GPM	1 - 11 L/min
	N100	3 - 50 GPM	11 - 190 L/min
Accuracy (% of Reading):	A025 & N025: Application Dependent [†]		
	A100, A200 & N100: ± 1.5%		
Repeatability:	A025	± 1.0%	
	A100	± 0.2%	
	A200	± 0.2%	
	N025	± 1.0%	
	N100	± 0.2%	

*ISO 7 Designation is RC.
[†]Accuracy can vary up to ± 5% depending on installation and fluid type. Field calibration is recommended for best accuracy.

DIMENSIONS

	A025, 1 in. Low Flow	A100, 1 in.	A200, 2 in.	N025, 1 in. Low Flow	N100, 1 in.
A = Height*	2.5 in. (6.3 cm)	2.5 in. (6.3 cm)	4.25 in. (11.4 cm)	2.5 in. (6.3 cm)	2.5 in. (6.3 cm)
B = Width	2.0 in. (5.1 cm)	2.0 in. (5.1 cm)	3.0 in. (7.6 cm)	2.0 in. (5.1 cm)	2.0 in. (5.1 cm)
C = Length	4.0 in. (10.1 cm)	4.0 in. (10.1 cm)	6.0 in. (15.2 cm)	4.0 in. (10.1 cm)	4.0 in. (10.1 cm)

*Height includes 0.7 in. (1.8 cm) for the computer electronics.

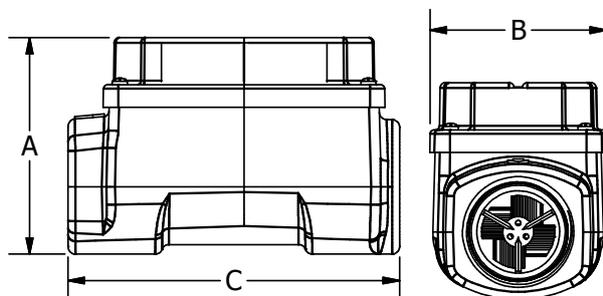

Pressure Rating (Aluminum):	300 psi (21 bar)	
Pressure Rating (Nylon):	150 psi (10.3 bar)	
Operating Temperature Range:	-40° F to 250° F (-40° C to 121° C)	
	with Safe Area Only Display: 0° F to 140° F (-18° C to 60° C)	
	with Intrinsically Safe Display: 0° F to 129° F (-18° C to 54° C)	
Typical K-Factor:	A025	2,200 PPG (581 Pulses/L)
	A100	730 PPG (193 Pulses/L)
	A200	72 PPG (19 Pulses/L)
	N025	2200 PPG (581 Pulses/L)
	N100	730 PPG (193 Pulses/L)
Frequency Range:	A025	11-110 Hz @ 0.3-3 GPM (1-11 L/min)
	A100	36.5-608.3 Hz @ 3-50 GPM (11-190 L/min)
	A200	36-360 Hz @ 30-300 GPM (114-1135 L/min)
	N025	11-110 Hz @ 0.3-3 GPM (1-11 L/min)
	N100	36.5-608.3 Hz @ 3-50 GPM (11-190 L/min)
Recommended Strainer Size:	A025	55 mesh (275 µm)
	A100	28 mesh (700 µm)
	A200	28 mesh (700 µm)
	N025	55 mesh (275 µm)
	N100	28 mesh (700 µm)
Wetted Materials (Aluminum):	Housing:	Aluminum
	Bearings:	Ceramic (96% Alumina)
	Shaft:	Tungsten Carbide
	Rotor:	Nylon
	Rings:	316 Stainless Steel
Wetted Materials (Nylon):	Housing:	Nylon
	Bearings:	Ceramic (96% Alumina)
	Shaft:	Tungsten Carbide
	Rotor:	Nylon
	Rings:	316 Stainless Steel
Calibration Report:	Comes standard with A1 Series meters.	
	N.I.S.T. – Certification available.	

ACCESSORIES

Part No.	Description
113275-10	FM Approved Remote Kit Assembly [‡]
113435-10	Conditioned Signal Output Module
125260-02	90° Display Adapter Kit
120077-01	FM Approved Sensor Kit [‡]
120077-02	ATEX Approved Sensor Kit
113524-01	Connector Kit for FM or ATEX Approved Sensor [‡]
125060-10	Pulse Out, External Power, Scaled Pulse Module
125100-10	4-20 mA Module

[‡]Does not make Non-FM Approved meters FM Approved.

476 Boundary Rd
 Derrimut
 VICTORIA 3026

Phone: 03 9311 7822
 E-mail: sales@liquipvictoria.com.au

