

PIUSI CUBE 70 MC DIESEL FUEL DISPENSER

EN. Diesel fuel dispenser for non commercial use. Sturdy structure designed for different applications: can be fixed to walls, tanks cisterns, drums, special pedestals. Self-priming vane pump fitted with bypass, installed on anti-vibration supports. Mechanical seal. Induction motor fitted with thermal motor overload protection. Automatic nozzle with swivel connection. Integrated nozzle holder with stop/start pump lever. Intake mesh filter.


Fitted with oval gear meters and an electronic unit for multiuser control and pre-selected dispensing.

Local memory capable of storing data for last 255 operations. Interfaces with PC for sending and organising data. Possibility of entering vehicle registration number, kilometres, date and time of dispensing operation.

Magnetic keys (Kit keys) available for user identification.

On request: a dedicated software for printing individual summaries of dispensing details.

DIMENSIONS

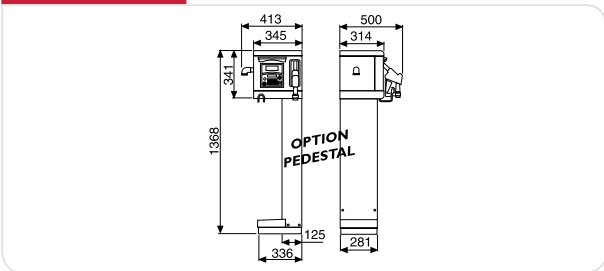

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging mm	pcs/ box	N. Boxes/ Europallet	
	kg	lbs			✈️	🚚
F0059400C	25	55	400x400x460	1	12	24
F0059413B	25	55	400x400x460	1	12	24
F0059414B	25	55	400x400x460	1	12	24
F0059415B	25	55	400x400x460	1	12	24
F00594220	25	55	400x400x460	1	12	24



Pedestal (optional)
Code F1270800C


Flow-rate up to 70 l/min (up to 18 gpm)	Accuracy +/- 0,5%	Users no. 120 max.
--	---------------------------------------	---




Cube 70 MC



Available
PRESET
VERSION



FEATURES



Display cover

ON REQUEST



Self service desk software

See "Fluid monitoring" section

ON REQUEST



Kit wall support

Code R12737000



Water captor



Kit lock

Code: R12738000
(Key lock not included)



DC version



2" Quick coupling

Code R08930000



2" Drum connector

with integrated valve
Code F17163000

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Flow-rate		Voltage			Pump mod.	Meter mod.	Nozzle type	Filter H ₂ O filter	Inlet BSP	Hose		PC connection	Users no.
			l/min	gpm	AC V./Hz	DC Volt	Power Watt						Amp. max.	length		
F0059400C	Cube 70 MC	D	70	18	230/50	900	4,2	Panth 72	K600	Aut.	NO	1"	4 m	1"	YES	50
F0059413B	Cube 70 MC DC 12V	D	56	15	12	300	35	Panth DC	K600	Aut.	NO	1"	4 m	1"	YES	50
F0059414B	Cube 70 MC DC 24V	D	70	18	24	420	25	Panth DC	K600	Aut.	NO	1"	4 m	1"	YES	50
F0059415B	Cube 70 MC 120 UT	D	70	18	230/50	550	3,3	Panth 72	K600	Aut.	NO	1"	4 m	1"	YES	120
F00594220	Cube 70 MC 12V 120 UT	D	56	15	12	300	35	Panth DC	K600	Aut.	NO	1"	4 m	1"	YES	120

Upon request it is available with different voltages and 60 Hz frequency

48 Vella Drive
Sunshine West
VICTORIA 3020

Phone: (03) 9311 7822
Fax: (03) 9311 8784
E-mail: sales@liquipvictoria.com.au

