

PIUSI K700 DIESEL MECHANICAL METRES

EN. Oval gear mechanical flow meters designed for accurate measuring of the quantity (of fuel) dispensed for medium - high flow rates. These flow meters are reliable, economical and easy to install. The sturdy body and the mechanical display system allows you to use the flow meter in particularly demanding environments.


- 4 digit partial totals (max 9999 litres), 7 digit totals.

- Can be calibrated.

PERFORMANCE

- Flow rates 40 - 220 l/min
- Accuracy +/- 1,5 %
- Repeatability 0.2 %
- Max. operating pressure 10 bar
- Bursting pressure 30 bar

DIMENSIONS

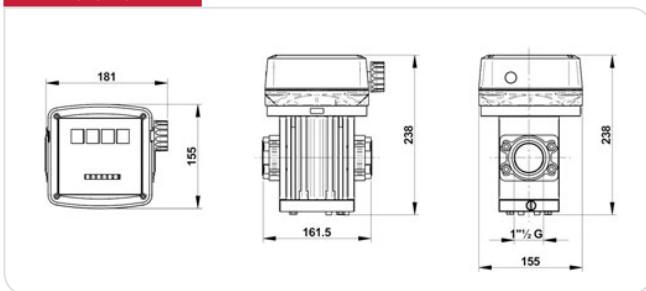

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		N. Boxes/ Europallet	
	kg	lbs	mm	pcs/ box		
F00540000	5,8	12,8	240x240x275	1	48	72
F00540040	5,8	12,8	240x240x275	1	48	72
F00540050	5,8	12,8	240x240x275	1	48	72
F00540080	5,8	12,8	240x240x275	1	48	72



Fluid Handling Innovation




THE HOME OF Fuelcraft

Flow-rate
up to
220 l/min
(up to 53 gpm)


Accuracy
 \pm
1,5 %



K700 M

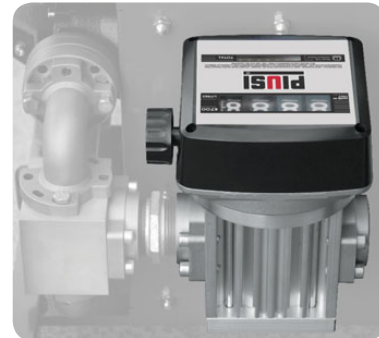

FEATURES

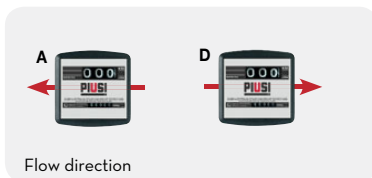

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluid type	Flow direction	Flow-rate		Pressure		Inlet filter	Inlet Outlet
				l/min	gpm	bar	psi		
F00540000	K700M Ver. A	D	←	40 - 220	5 - 53	10	142	YES	1" 1/2 BSP
F00540040	K700M Ver. D	D	→	40 - 220	5 - 53	10	142	YES	1" 1/2 BSP
F00540050	K700M GAL Ver. A	D	←	40 - 220	5 - 53	10	142	YES	1" 1/2 NPT
F00540080	K700M GAL Ver. D	D	→	40 - 220	5 - 53	10	142	YES	1" 1/2 NPT

48 Vella Drive
Sunshine West
VICTORIA 3020

Phone: (03) 9311 7822
Fax: (03) 9311 8784
E-mail: sales@liquipvictoria.com.au

