PUMP DRUM EX100





FEATURES Flammable fluids

▶ Thermal Protection

transfer

► Suction unit with

integrated strainer

- ▶ Built-in bypass valve
- ▶ UL version available
- ► Flow Rate: Up to

100 L/min

► Power: 240V AC

Also suitable for

Diesel transfer




PUMP DRUM EX100

Transfer Kit for Flammable Fluids

The Piusi EX100 Pump Drum is the new transfer kit for flammable fluids, characterised by a high flow rate and works with a continuous duty cycle. Simple to use, compact and versatile, it adapts to any working conditions: you can use it wherever you need it most. The Piusi EX100 Drum is ATEX certified and complies with directives on the use of materials in potentially explosive atmospheres.

KIT CONTENTS


- ► EX100 Pump
- ▶ Nozzle Holder
- ▶ 2" Tank Connector
- ▶ 90° Flanged Elbow
- ► K150 ATEX Meter (on selected version)
- ► A140 ATEX Automatic Nozzle (on selected version)
- ► Delivery Hose (on selected version)
- ▶ Instruction Manual

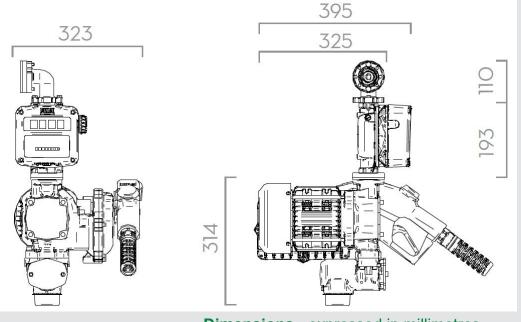

Dimensions - expressed in millimetres

PUMP DRUM EX100



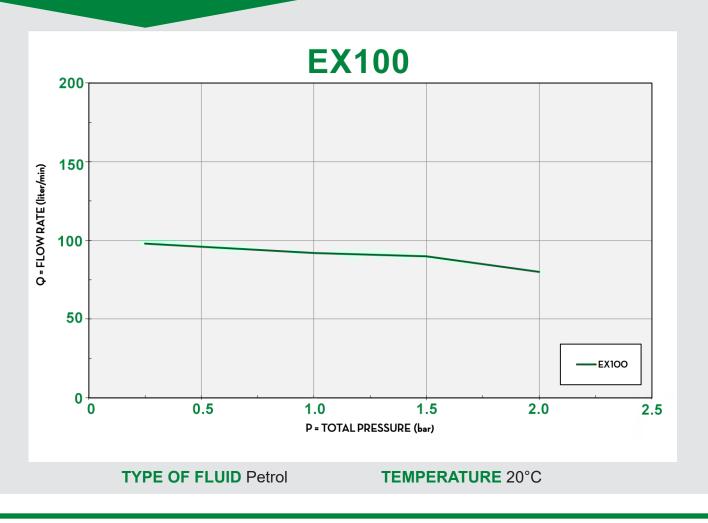

(D) DIESEL, (P) PETROL, (K) KEROSENE

| TECHNICAL DATA | | | | | | | | | | | | | | |
|----------------|--|----------------|-----------|-----|-------------|---------------|-------------|------------|--------|--------|----------|----------|-----------------|----------------------|
| CODE | DESCRIPTION | FLUID TYPES | FLOW RATE | | VOLTAGE | | | DUTY CYCLE | INLET | OUTLET | METER | DELIVERY | BENDING PRO- | ULTRA HI- FLOW |
| | | | L/MIN | GPM | AC V./HZ | POWER WATT | AMP MAX. | CONTINUOUS | 114551 | COILLI | IVILILIK | HOSE | TECTION | AUTO NOZZLE |
| F00391010 | (EX) EX100 DRUM 230V/50HZ (PUMP ONLY) | D,P,K | 100 | 25 | 230/50 | 1035 | 4.5 | YES | 2" BSP | 1" BSP | - | - | - | - |
| F00391020 | (EX) EX100 DRUM 230V/60HZ (PUMP ONLY) | D,P,K | 100 | 25 | 230/60 | 874 | 3.8 | YES | 2" BSP | 1" BSP | - | - | = | 12 |
| F00391300 | (EX) EX100 DRUM 230/50 /A140/5MT | D,P,K | 100 | 25 | 230/50 | 1035 | 4.5 | YES | 2" BSP | 1" BSP | - | D.25 5MT | YES | A140 |
| F00391320 | (EX) EX100 DRUM 230/60 /A140/5MT | D,P,K | 100 | 25 | 230/60 | 874 | 3.8 | YES | 2" BSP | 1" BSP | - | D.25 5MT | YES | A140 |
| F00391310 | (EX) EX100 DRUM 230/50 /A140/K150/5MT | D,P,K | 100 | 25 | 230/50 | 1035 | 4.5 | YES | 2" BSP | 1" BSP | K150 | D.25 5MT | YES | A140 |
| F00391330 | (EX) EX100 DRUM 230/60 /A140/K150/5MT | D,P,K | 100 | 25 | 230/60 | 874 | 3.8 | YES | 2" BSP | 1" BSP | K150 | D.25 5MT | YES | A140 |

() UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY.
COMPATIBLE FLUIDS: DIESEL, KEROSENE, PETROL, PETROL ALCOHOL MIXED MAX 15%, AVGAS 100/100LL, JET A/A1 - ASPEN 2/4

476 Boundary Rd Derrimut

VICTORIA 3026

Phone: 03 9311 7822

E-mail: sales@liquipvictoria.com.au

