



PIUSI MCBOX FUEL MANAGEMENT SYSTEM

EN. Multi-user control panel with accessories for PC connection.
 MC BOX permits: Pump ignition, identification of authorised users, Pre-selection of dispensed quantity, Management of pulse metre, Management of an external switch to switch off pump at minimum level, Management of micro switch connected to nozzle support, Connection to an external printer.
 Technical features: Panel with dual display, keyboard and i-button reader. Controls up to 120 users through passwords or i-button keys. Calculates consumption of each individual user. Local memory up to last 255 operations. Possibility of inserting vehicle registration number, kilometres, date and time of dispensing.
 Dedicated software for printing individual detailed summaries.
 Possibility of managing up to 16 panels with one software. Key reader with USB socket for exporting data. RS converter with USB socket for direct connection with PC via cable up to 1000 metres.

DIMENSIONS

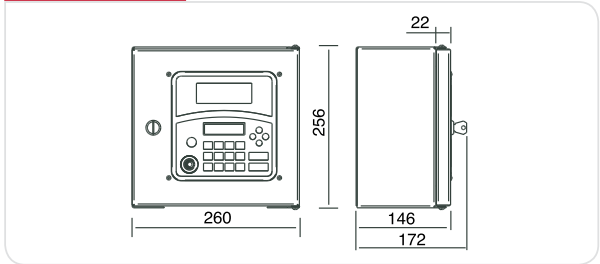

DIMENSIONS

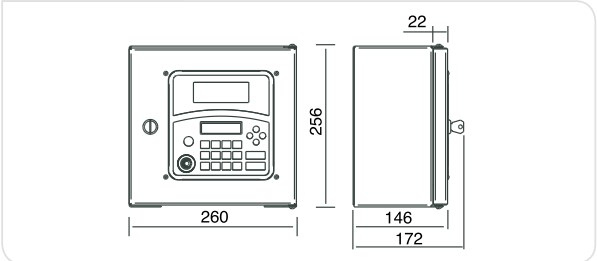

PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		
	kg	lbs	mm	inch	pcs/box
F0057201B	9	19,4	480x370x265	18,9x14,6x10,4	1
F1398000C	5	19,4	480x370x265	18,9x14,6x10,4	1
F1398003C	5	19,4	480x370x265	18,9x14,6x10,4	1
F1398005B	5	19,4	480x370x265	18,9x14,6x10,4	1
F1398006B	5	19,4	480x370x265	18,9x14,6x10,4	1
F1398001B	6	13,2	480x370x265	18,9x14,6x10,4	1
F1398002B	6	13,2	480x370x265	18,9x14,6x10,4	1



Users
no.
120



FEATURES

ON REQUEST

Easy access to connection

Oval gear pulse meter

Turbine pulse meter

Self service desk software

Level control

Ocio Level indicator

Display cover

K600/2-3 3/4" oil
Code F00472A20
K600/3 1" diesel
Code F00472A00

K24 1" AdBlue®
Code F0040721B

See "Fluid monitoring" section

Code F17121000 for Diesel only

PRODUCTS' RANGE TECHNICAL DATA

Code	Description	Fluids type	Users	Voltage			Meters
				AC V/Hz DC Volt	Power Watt	Amp. max. (load motor)	
F0057201B	MC BOX complete *	D O	80	230/50	35	6,5	K600/3
F1398000C	MC BOX (any fluids)	D E O K	80	230/50	35	6,5	-
F1398003C	MC BOX (any fluids) 120 V	D E O K	120	120/60	35	6,5	-
F1398005B	MC BOX (any fluids)	D E O K	120	230/50	35	6,5	-
F1398006B	MC BOX (AdBlue®)	U	120	230/50	35	6,5	-
F1398001B	MC BOX 12V	D E O K	120	12	10	50	-
F1398002B	MC BOX 24V	D E O K	120	24	10	25	-

* Complete by: CD rom with software, 10 lbutton user key, 1 lbutton manager key, USB plug lbutton key reader for PC

48 Vella Drive
Sunshine West
VICTORIA 3020

Phone: (03) 9311 7822
Fax: (03) 9311 8784
E-mail: sales@liquipvictoria.com.au

