

# PIUSI SELF SERVICE MC DIESEL BOWSER

**EN.** Complete range of fuel dispensers for non commercial use. Sturdy structure fitted with front door for easy maintenance operations. High capacity vane pump. Inbuilt bypass. Automatic nozzle with swivel connection. Inbuilt water absorption filter (or on request according to model) to ensure that dispensed product is free of impurities.


Fitted with oval gear meters and an electronic unit for multiuser control and pre-selected dispensing. Local memory capable of storing data for last 255 operations. Interfaces with PC for sending and organising data. Possibility of entering vehicle registration number, kilometres, date and time of delivery. Magnetic keys (Kit keys) available for user identification.

On request: Self Service Management 2018 for printing individual summaries of dispensing details.

## PERFORMANCE

- Flow rate up to 90 l/min
- Accuracy: +/- 0.5 %
- Continuous AC operation.
- Noise level below 75 dB
- IP55 protection

## DIMENSIONS

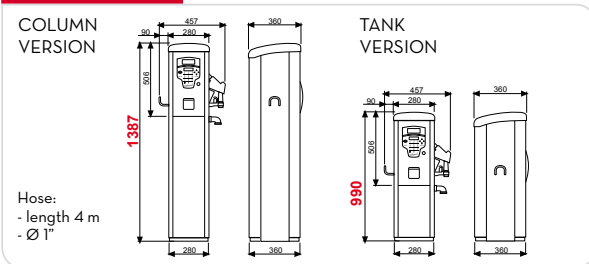

## PRODUCTS' RANGE WEIGHT AND PACKAGING

Code	Weight		Packaging		N. Boxes/ Europallet	
	kg	lbs	mm	pcs/ box	✈	🚛
<b>F0073801C</b>	67	148	1478x488x400	1	6*	4
<b>F0074101C</b>	75	165	1478x488x400	1	6*	4
<b>F00738060</b>	67	148	1478x488x400	1	6*	4
<b>F00738B0C</b>	57	126	1080x488x400	1	6*	4
<b>F00741B0C</b>	65	143	1080x488x400	1	6*	4

\* Pallet XL



Fluid Handling Innovation



THE HOME OF **Fuelcraft**



<b>Flow-rate</b> up to <b>90</b> l/min (up to 24 gpm)	<b>Accuracy</b> +/- <b>0,5%</b>	<b>Users</b> no. <b>80</b> max.
--	---------------------------------------	--



Column version



Tank version



**FEATURES**

**Water captor**

H<sub>2</sub>O

(only column versions)

**Display cover**

**ON REQUEST**

**Self Service Management 2018**

Software pag. 32

**Users management**

User key

Code **F15904000**  
(10 pcs)

**PRODUCTS' RANGE TECHNICAL DATA**

Code	Description	Fluids type	Flow-rate		Voltage			Pump mod.	Meter mod.	Nozzle type	Filter		Inlet BSP	PC connection
			l/min	gpm	AC V/Hz	DC Volt	Power Watt				Amp. max.	H <sub>2</sub> O filter		
<b>F0073801C</b>	Self service 70 MC F	D	70	18	230/50	900	4,2	Panth 72	K600	Aut.	YES	30 μ	1"1/2	YES
<b>F0074101C</b>	Self service 100 MC F	D	90	24	230/50	1150	5,7	E 120	K600	Aut.	YES	30 μ	1"1/2	YES
<b>F00738060</b>	Self service 70 MC F Printer*	D	70	18	230/50	900	4,2	Panth 72	K600	Aut.	YES	30 μ	1"1/2	YES
<b>F00738B0C</b>	Self service 70 MC Tank	D	70	18	230/50	900	4,2	Panth 72	K600	Aut.	NO	-	1"1/2	YES
<b>F00741B0C</b>	Self service 100 MC Tank	D	90	24	230/50	1150	5,7	E 120	K600	Aut.	NO	-	1"1/2	YES

\* with 7 m hose

Upon request it is available with different voltages and 60 Hz frequency

48 Vella Drive  
Sunshine West  
VICTORIA 3020

Phone: (03) 9311 7822  
Fax: (03) 9311 8784  
E-mail: sales@liquipvictoria.com.au



THE HOME OF **Fuelcraft**